LC3 Assembly Programming

Recap: LC3 ISA

- LC3 is a 16 bit processor
- 15 opcodes, 8 registers
- Unique encoding for each instruction
- Dataflow diagram for each instruction = how each instruction is implemented/executed
    - Languages to specify dataflow:
        - o RTL (Register transfer language) ..used by gcc compilers
        - o Hardware description languages (Verilog, VHDL)
- Given a segment of machine code = corresponds to instructions in a program
- After exam: design of LC3 datapath
    - Implementing Central Processing Unit (CPU) using the combinational and sequential devices at our disposal.

2

Assembly Language:
Human-Readable Machine Language

- how painful was it to read (/write) machine instructions ?
- Computers like ones and zeros…

$$0001110010000110$$

- Humans like symbols…

```
Inclass Code:
LD R2, X   ; R2= X, X contained #5
ADD R1, R2,  # -8    ; R1= R2 -8
BRnz someplace
```

- Assembler is a program that turns symbols into machine instructions.

3

3

Programming in Assembly

- Assembly language level is one-step up from machine
  - All instructions used in Assembly are actual machine instructions….*somewhat!*
  - Use mnemonics and address labels to make it easier to understand the program
    - o Labels converted to addresses and offsets by assembler
  - "macros" and utilities to make it easier
- Assembler directives
  - Tell assembler what to do without the programmer explicitly writing out the machine code to do the task
 - Allocating storage
  - Initializing data

Writing program in assembly requires knowing the Instruction set !

4

4

LC-3 Assembly Language Syntax

▪Each line of a program is one of the following:
- an instruction
- an assembler directive (or pseudo-op)
- a comment

▪Whitespace (between symbols) and case are ignored.

▪Comments (beginning with ";") on one line are also ignored.

▪An instruction has the following format:

```
LABEL OPCODE OPERANDS ; COMMENTS
```

optional   *mandatory*
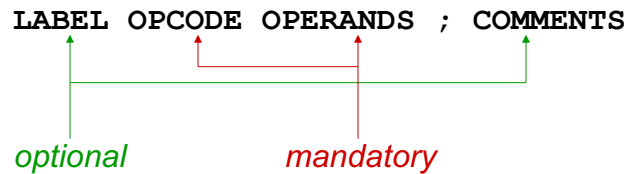
Opcodes and Operands

▪Opcodes
- reserved symbols that correspond to actual (LC-3) instructions
- listed in Appendix A
  - ex: `ADD, AND, LD, LDR, ...`

▪Operands
- registers -- specified by Rn, where n is the register number
- numbers -- indicated by # (decimal) or x (hex)
- label -- symbolic name of memory location
- separated by comma
- number, order, and type correspond to instruction format
  - ex:
    ```
    ADD  R1,R1,R3      ; R1 = R1 + R3
    ADD  R1,R1,#3      ; R1 = R1 + #3
    LD   R6,NUMBER     ; R6 = Mem(Address of Number)
    BRz  LOOP          ; if previous zero go to address LOOP
    ```

Labels and Comments

- Label
  - placed at the beginning of the line
  - assigns a symbolic name to the address corresponding to line
    - ex: LOOP corresponds to some specific memory address
      ```
      LOOP    ADD    R1,R1,#-1
              BRp    LOOP
      ```
    - ex: temp1 corresponds to a memory address – int temp1=7; ?
      ```
      temp1  .FILL #7  ; temp1 = 7
      ```
- Comment
  - anything after a semicolon is a comment
  - ignored by assembler
  - used by humans to document/understand programs
  - tips for useful comments:
    - avoid restating the obvious, as "decrement R1"
    - provide additional insight, as in "accumulate product in R6"
    - use comments to separate pieces of program

Assembler Directives

- Pseudo-operations.. To make programmer's life easier
  - do not refer to operations executed by program
  - used by assembler
  - **looks like instruction, but "opcode" starts with dot**

Opcode	Operand	Meaning
.ORIG	address	starting address of program
.END		end of program
.BLKW	n	allocate n words of storage
.FILL	A	allocate one word, initialize with value A
.STRINGZ	n-character string	allocate n+1 locations, initialize w/characters and null terminator

Trap Codes

- LC-3 assembler provides "pseudo-instructions" for each trap code, so you don't have to remember them... *more on TRAP instructions later*...

Code	Equivalent	Description
HALT	TRAP x25	Halt execution and print message to console.
IN	TRAP x23	Print prompt on console, read (and echo) one character from keybd. Character stored in R0[7:0].
OUT	TRAP x21	Write one character (in R0[7:0]) to console.
GETC	TRAP x20	Read one character from keyboard. Character stored in R0[7:0].
PUTS	TRAP x22	Write null-terminated string to console. Address of string is in R0.

9

9

```
Example Assembly Program – Add 2 to non-negative
number in memory (variable temp1) and store into
another memory location (variable temp2)
; load number from location temp1,
        .ORIG x3000  ;program starts at address x3000
        LD    R1, temp1    ; load value from temp1 to
                                       register R1
            note: offset not specified by programmer
                    assembler calculates offset needed
        BRn Done  ;if number is Negative goto end
        ADD   R3, R1, #2   ; else Add 2 and store into R3
        ST    R3, temp2  ; store result in R3 into temp2
Done    HALT   ;halt program
;
temp2   .BLKW 1 ; reserve/set aside one word in memory
temp1   .FILL x0005        ; initialize number to 5

        .END   ; end of program
```

C code:
temp1 = 5;
temp2 = temp1 +2 ;

10

10

5

```
    Example Assembly Program – Add 2 to non-negative
    number in memory (variable temp1) and store into
    another memory location (variable temp2)
    ;
    .ORIG x3000   ;program starts at address x3000
        LD R1, temp1  ;load value from temp1 to register R1
               note: offset not specified by programmer
                     assembler calculates offset needed
        BRn Done      ; if number negative then done/end
        ADD R3, R1, #2   ;else add 2 to number and store into R3
        ST R3, temp2 ;store result in R3 into memory loc. temp2
Done   HALT             ; halt program

temp2  .BLKW #1        ;reserve one word in memory

temp1  .FILL x0005    ;initialize location temp1 to 5

       .END           ;end of program
```

C code:
temp1 = 5;
temp2 = temp1 +2 ;

11

11

Label: refers to a memory location

```
; assembly program for temp2= temp1 +2;
        .ORIG x3000  ;program starts at address x3000
        LD      R1, temp1    ; temp1 is location in memory
                 ; note: offset not specified by programmer
        BRn Done  ;if number is Negative goto end
        ADD     R3, R1, #2    ; Add 2 store into R3
        ST      R3, temp2  ; store result into temp2
Done    HALT    ;halt program
;
temp2   .BLKW  1
temp1   .FILL  x0005

        .END    ; end of program
```

Must have Opcode and Operands

int temp2;

Immediate values/constants
Decimal   #
Binary   b
Hex   x

int temp1 =5;

.BLKW is Assembler Directive (reserve one location with label 'temp2')

.FILL is Assembler Directive (reserve one location with label 'temp1') and
Initialize the value there to be x0005

12

12

6

```
    ; Example Assembly Program – Add 2 to non-negative
  number and store into another memory location
  ; load number from locations HERE,
          .ORIG x3000  ;program starts at address x3000
          LD    R1, HERE       ; location in memory
                 ; note: replace temp1 by HERE
          BRn Done  ;if number is Negative goto end
          ADD   R3, R1, #2    ; Add 2 store into R3
          ST    R3, PLACE2  ; store result into PLACE2
  Done    HALT   ;halt program
  ;
  PLACE2  .BLKW  1             ; temp2 replaced by PLACE2
  HERE    .FILL  x0005         ; temp1 replaced by HERE

          .END   ; end of program

          This code would generate identical
          machine code as previous with labels
          temp1, temp2                              13
```
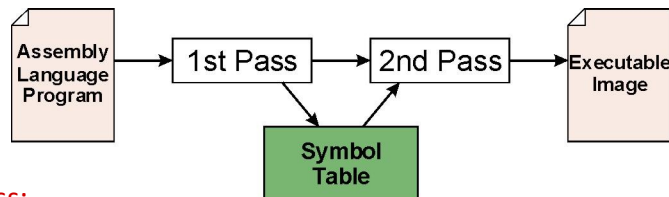
13

Assembly Process

▪Assembler: Converts assembly language file (.asm)
into an executable file (.obj) ...*for the LC-3 simulator in our case*.

▪First Pass:
- scan program file
- find all labels (variables?) and calculate the corresponding addresses; this is called the *symbol table*

▪Second Pass:
- convert instructions to machine language, using information from symbol table

14

14

7

First Pass: Constructing the Symbol Table

1. Find the `.ORIG` statement,
    which tells us the address of the first instruction.
    *   Initialize location counter (LC), which keeps track of the current instruction.

2. For each non-empty line in the program:
    a) If line contains a label, add label and LC to symbol table.
    b) Increment LC.
        - **NOTE: If statement is `.BLKW` or `.STRINGZ`, increment LC by the number of words allocated.**

3. Stop when `.END` statement is reached.

▪ NOTE: A line that contains only a comment is considered an empty line.

15

15

```
                                      Address/Location:
   .ORIG x3000
          LD    R1, TEMP1    x3000

          BRn Done           x3001
          ADD   R3, R1, #2   x3002
          ST    R3, PLACE2   x3003
  Done    HALT               x3004
  ;
  temp2   .BLKW 1            x3005
  temp1   .FILL x0005        x3006

          .END ; end of program
```

address

labels

16

16

Pass 1

▪Construct the symbol table for the program

Symbol	Address
Done	x3004
temp2	x3005
temp1	x3006

LD R1, TEMP1 is at address x3000
PC is x3001 when this is executed…therefore offset = ??

Second Pass: Generating Machine Language

▪For each executable assembly language statement,
generate the corresponding machine language instruction.
- If operand is a label, look up the address from the symbol table.
- Calculate offset from current instruction PC
  - Ex: LD R1, TEMP1 is LD R1, offset #5
  - Encoding: **0010 001** 000000101

▪Potential problems (i.e., syntax errors):
- Improper number or type of arguments
  - ex: NOT   R1,#7
           ADD   R1,R2
           ADD   R3,R3,NUMBER
- Immediate argument too large
  - ex: ADD   R1,R2,#1023
- Address (associated with label) more than 256 from instruction
  - can't use PC-relative addressing mode

Pass 2

▪Using the symbol table constructed earlier,
translate these statements into LC-3 machine language.

Statement	Machine Language
LD R1, temp1	0010 001 000000101
BRn Done	0000 100 000000010
ADD R3, R1, #2	0001 011 001 1 00010

Multiple Object Files

▪An object file is not necessarily a complete program.
  • system-provided library routines
  • code blocks written by multiple developers

▪For LC-3 simulator, can **manually** load multiple object files into memory, then start executing at a desired address.
  • system routines, such as keyboard input, are loaded automatically
      ○ loaded into "system memory," below x3000
      ○ user code should be loaded between x3000 and xFDFF
  • each object file includes a starting address
  • be careful not to load overlapping object files

Linking and Loading

▪*Loading* is the process of copying an executable image into memory.

- more sophisticated loaders are able to *relocate* images to fit into available memory
  - o must readjust branch targets, load/store addresses

▪*Linking* is the process of resolving symbols between independent object files.

- suppose we define a symbol in one module, and want to use it in another   (analogy: multiple files in C)
- some notation, such as .EXTERNAL, is used to tell assembler that a symbol is defined in another module
- linker will search symbol tables of other modules to resolve symbols and complete code generation before loading

21

21

Programming in assembly..

- Style guidelines
- Problem decomposition and mapping to assembly

22

22

Style Guidelines

1. Provide a program header…standard stuff

2. Start labels, opcode, operands, and comments in same column for each line. (Unless entire line is a comment.)

3. Use comments to explain what each register does.

4. Give explanatory comment for most instructions.

5. Use meaningful symbolic names.
   1. Mixed upper and lower case for readability.
   2. ASCIItoBinary, InputRoutine, SaveR1

6. Provide comments between program sections.

23

Recap: Problem Solving and Problem Decomposition

- With an eye towards writing assembly programming/low-level software

- Flowcharts anyone ?

- Decomposition:
  - Break problem/solution into sub-problems/modules
    - Structured programming
  - Connect the modules…
    - With conditionals, iterations, sequence,….
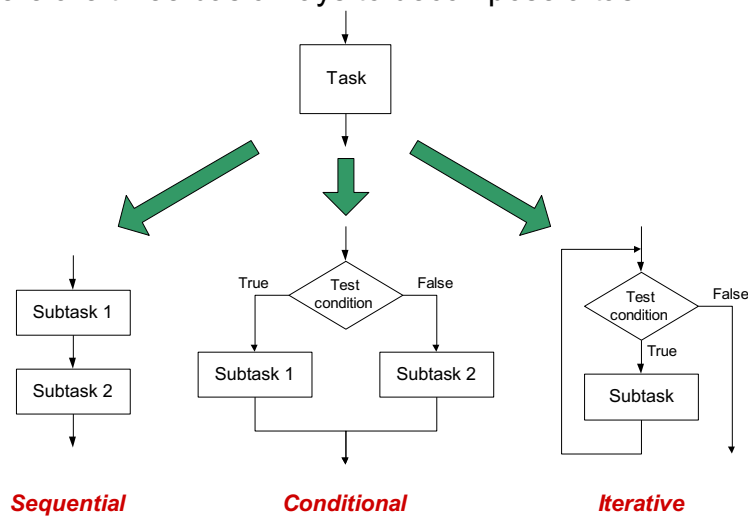
24

Example

- Array of N numbers
- Read length N of the array
- Replace negative numbers by 0   *- check condition*
- Add all the (new) numbers   *- iterate over array*
- Print the sum

25

Three Basic Constructs

▪There are three basic ways to decompose a task:

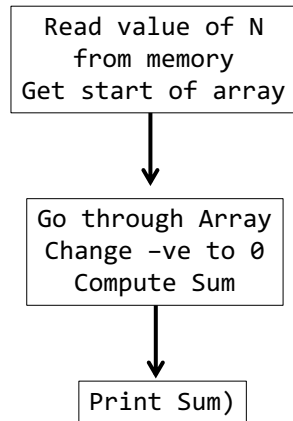*Sequential*   *Conditional*   *Iterative*

26

Sequential

▪do Subtask 1, then subtask 2, etc.

```
1.  Process Array of Nums
2.  Change -ve to 0
3.  Compute Sum of nums
4.  Print Sum (to memory)
```

➡

```
Read value of N
   from memory
Get start of array
```

```
Go through Array
Change -ve to 0
  Compute Sum
```

```
Print Sum)
```

27

27

Conditional

▪If condition is true, do Subtask 1;
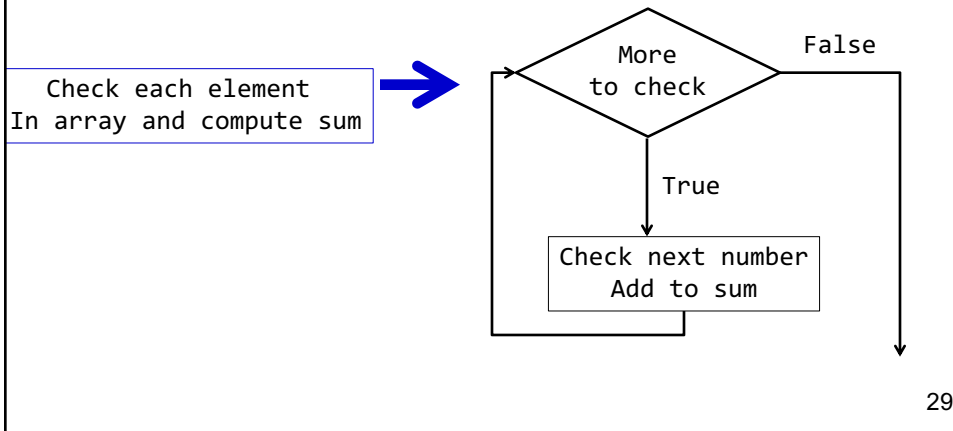else, do Subtask 2.

```
Check if number >=0
  Change -ve to 0
```

➡

Yes   x < 0   No

```
x = 0
```

```
x = x
```

```
Next subtask…
(add values)
```

28

28

14
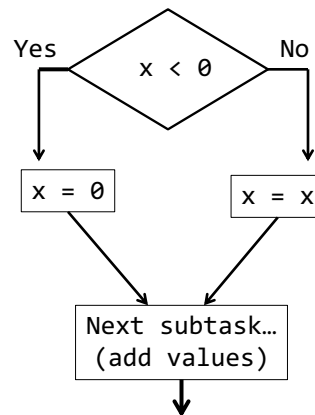
Iterative

- Do Subtask over and over, as long as the test condition is true.

```
   Check each element        ➜        More        False
In array and compute sum              to check

                                         True

                                 Check next number
                                    Add to sum
```

LC-3 Control Instructions

- How do we use LC-3 instructions to encode the three basic constructs?

- Sequential
  - Instructions naturally flow from one to the next, so no special instruction needed to go from one sequential subtask to the next.

Two instructions to negate R1, i.e. to compute 2's complement of R1

- Conditional and Iterative
  - Create code that converts condition into N, Z, or P.
    Example:
      Condition: "Is R0 = R1?"
      Code: Subtract R1 from R0; if equal, Z bit will be set.
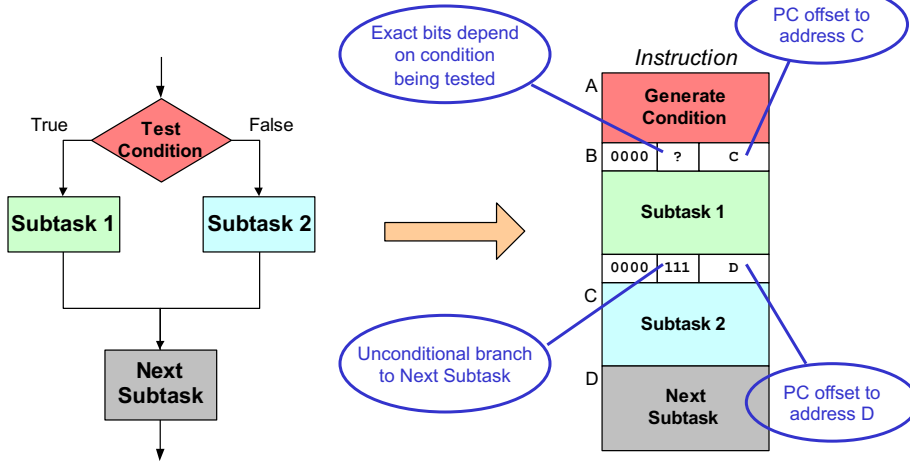 - use BR instruction to transfer control to subtask.

```
NOT R1, R1
ADD R1, R1, #1
ADD R2, R0, R1
BRz equal
```

Question: if condition is "R0 > R1" then what do we change Branch condition to ?
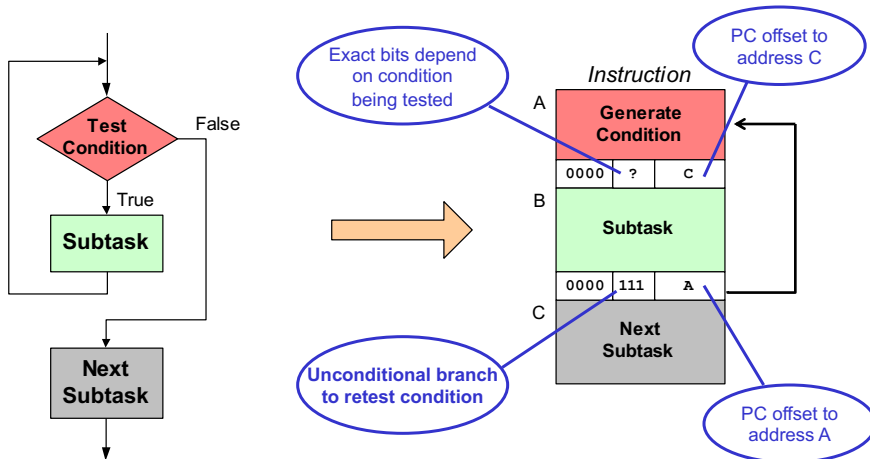
30

Code for Conditional

True — Test Condition — False

Subtask 1   Subtask 2

Next Subtask

Exact bits depend on condition being tested

PC offset to address C

Instruction

A — **Generate Condition**

B — 0000 ? C

Subtask 1

0000 111 D

C — **Subtask 2**

Unconditional branch to Next Subtask

D — **Next Subtask**

PC offset to address D

Assuming all addresses are close enough that PC-relative branch can be used.

31

31

Code for Iteration

Test Condition — False

True

Subtask

Next Subtask

Exact bits depend on condition being tested

PC offset to address C

Instruction

A — **Generate Condition**

0000 ? C

B — **Subtask**

0000 111 A

C — **Next Subtask**

Unconditional branch to retest condition

PC offset to address A

Assuming all addresses are on the same page.

32

Converting Code to Assembly

- Can use a standard template approach
- Typical Constructs
  - if/else
  - while
  - do/while
  - for

33

if/else

```
if(x > 0)                          LD    R1, X
{                                  BRp   THEN
    r2 = r3 + r4;                  ADD R5,R6,R7
}                                  BRnzp DONE
else                       THEN    ADD R2,R3,R4
{                          DONE    ...
    r5 = r6 + r7;
}
```

if/else

```
if(x > 0)                LD    R1,X
{                        BRnz ELSE
    r2 = r3 + r4;        ADD R2,R3,R4
}                        BRnzp DONE
else                ELSE ADD R5,R6,R7
{                   DONE ...
    r5 = r6 + r7;
}
```

35

while

Clearing a register/variable

```
x = 0;               AND R1,R1,#0
i = 10;              AND R2,R2,#0
while(i > 0)         ADD R1,R1,#10
{                WHL BRnz DONE
    x = x + i;       ADD R2,R2,R1
    i--;             ADD R1,R1,#-1
}                    BRnzp WHL
```

Initialize register/variable

Decrement count by 1

36